


Cardura E10P Monomer

Cardura E10P monomer is the glycidyl ester of Versatic™ Acid 10, a highly branched carboxylic acid containing 10 carbon atoms.

Cardura E10P monomer is a bulky and hydrophobic intermediate which is easily incorporated into resins via its reactive epoxy group.

Characteristics:

- Epoxy group content approximately: 4170 mmol/kg
- Boiling range: 251 278 °C (5 95 %)
- Low viscosity (23 °C): 7 mPa·s
- High flame / flash point
- Low colour
- Low vapour pressure
- EINECS and TSCA listed



Glycidyl Ester

Structural Features:

■ Epoxy group

Performance Characteristics:

- Highly reactive towards amines, acids, alcohols
- Enhanced metal adhesion

Versatic Acid 10

 $R^1 + R^2 = 7$ carbon atoms

Structure and Properties:

- Sterically protected ester group
- Bulky structure

Performance Characteristics:

- Excellent compatibility with polar solvents
- Excellent acid and alkali resistance
- Superior outdoor durability
- Improved gloss
- Improved pigment utilization
- Low solution viscosity
- High solids resins
- Improved polar solvent resistance
- Excellent solubility in aliphatic solvents




Chemistry


Cardura E10P monomer can easily be incorporated into acrylic polymers by the reaction of its epoxy group with the carboxylic group of (meth)acrylic acid to form a hydroxyl (meth)acrylate monomer

called (M)ACE. (M)ACE reacts with the other monomers via a radical polymerisation reaction. The epoxy-acid reaction and the radical polymerisation proceed simultaneously..

Incorporation of Cardura E10P Monomer in Acrylic Resins:

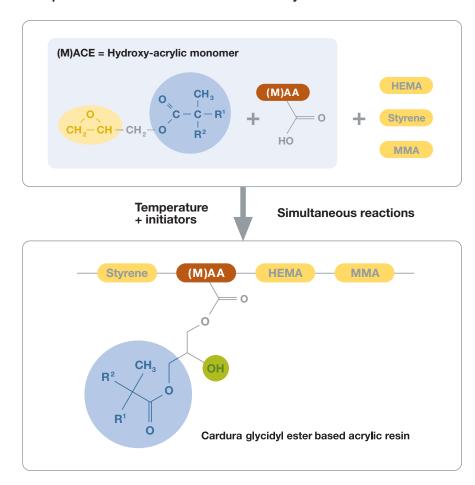

Preparation Procedure



- 1 Use Cardura monomer as reactive solvent
- 2 Heat to 140-170°C
- 3 Add gradually Monomers
 - + (meth)acrylic acid
 - + initiator

Process:

Cardura E10P monomer is used as a reactive solvent for the preparation of acrylic resins: it is charged into the reactor as part of the initial reactor constituents. This allows for the reduction or elimination of solvent during the polymerisation step and therefore increases the reactor efficiency. Mass polymerisation (without solvent) is possible. The initial reactor charge is heated to the desired polymerisation temperature. (Meth)acrylic acid is then gradually added to the reactor together with the acrylic monomers, styrene and the peroxide initiator over a period of time.

Higher Reaction Temperature:

Thanks to the high boiling point of Cardura E10P monomer, a high polymerisation reaction temperature can be maintained at a level where the required low molecular weight is easily achieved.

Very high solids, low viscosity resins are easily produced.


Added Values:

- Easy process
- Cardura E10P glycidyl ester used as reactive solvent
 - → Higher resin solids content
 - → Higher reactor throughput
- Higher reactive temperature
 - → Low Mw resin
 - → Low VOC acrylic resin

Effect of Cardura E10P Monomer on Polymer Solution Viscosity

Cardura E10P monomer produces lower viscosity acrylic resins which can be used for low VOC applications.

The higher the concentration of Cardura E10P monomer, the lower the polymer viscosity.

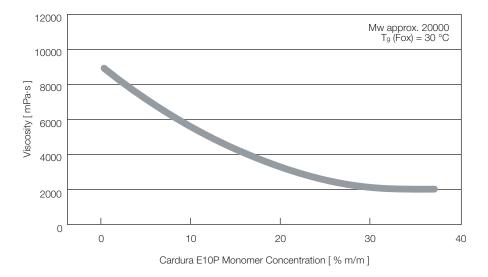

Viscosity / Co-solvent Content:

Cardura E10P monomer reduces the resin viscosity as the polymer has a shorter chain length at a similar molecular weight. Its bulky structure also limits the chain interactions. Therefore the solvent content of solvent-borne paints or the co-solvent content of water-based paints can be reduced.

Introduction of hydroxyl groups:

Cardura E10P monomer introduces hydroxyl groups into the resin via reaction with a carboxylic acid or an amine. These hydroxyl groups can be used, in combination with other hydroxy-functional intermediates, for reaction with the cross-linker, e.g. melamine formaldehyde and polvisocyanate resins.

Hexion: Helping you make it in today's world.

Our global team produces the best in specialty chemicals and performance materials and provides the technical expertise to customize them to your exact needs. The result? Specific solutions, not generic products, leading to thousands of breakthroughs that improve bottom lines and enhance lives.

Reach our Global Customer Service network at:

U.S., Canada and Latin America

+1 888 443 9466 / +1 614 986 2497 E-mail: 4information@hexion.com

Europe, Middle East, Africa and India

+800 836 43581 /+39 0331 355 349 E-mail: 4information.eu@hexion.com

China and Other Asia Pacific Countries

+86 2 1386 04835

E-mail: 4information.ap@hexion.com

Please refer to the literature code HXN-526 when contacting us.



World Headquarters

180 East Broad Street Columbus, OH 43215-3799

© 2017 Hexion Inc. All rights reserved.

® and ™ denote trademarks owned or licensed by Hexion Inc.

HXN-526 03/17.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.